


GC TBPMH

Tert-butyl 3,5,5-trimethylperoxyhexanoate

CAS Number 13122-18-4

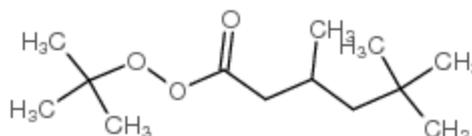

GC TBPMH can be used in the polymerization of styrene, acrylates, methacrylates, ethylene and as peroxides for thermoset resins.

PHYSICO-CHEMICAL PROPERTIES

Appearance	Clear liquid
Assay, %	Min. 97
Tert-butyl hydroperoxide content, %	Max. 0.1

HANDLING AND STORAGE: The processing and use of GC TBPMH requires adequate technical and professional knowledge. Please consult safety data sheet for further handling, storage and toxicity information.
GC TBPMH has to be stored in a tightly sealed original container in a cool and well-ventilated area (- 20 °C <T< + 25°C), away from direct sunlight. Keep away from reducing agents (e.g. amines), acids, alkalis, heavy metals compounds (e.g. accelerators, driers, metal soaps). Never weigh out in the storage room.

PACKAGING: Standard packaging of GC TBPMH is 20 Kg drum.

IMPORTANT NOTE Some plastic additives, fillers or pigments can have a significant influence on the properties of the end product. Before using this product, please be informed. Machine stop at high temperature could create degradation of polymers. Please clean with neutral polymers.

DISCLAIMER:

Information contained in this document is provided to the best of our knowledge and is considered true as per revision date. We do not accept any liability for loss and damage that may occur from the improper use of this information and for the use against the safety legal requirements and patent rights. This specification does not release the customer from the obligation to check the product as to its suitability for intended area of usage.