


GC B 58

TBBA Oligomer Carbonate, 2,4,6-Tribromophenyl-terminated

Chemical Formula $(C_7H_2Br_3O_2) \cdot (C_{16}H_{10}Br_4O_3)_n \cdot (C_6H_2Br_3O)$

CAS registry number 71342-77-3

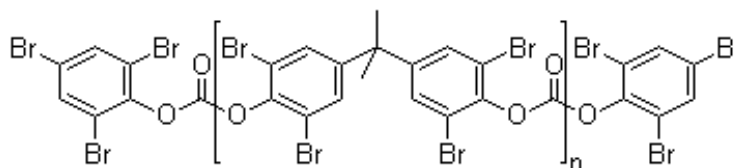

GC B 58 is a brominated flame retardant for thermoplastics polymers. It shows high thermal and UV stability.

The high thermal stability of GC B 58 allows the application in technical polymers as PBT, PET, PET/PBT blends, PC, ABS, PC/ABS blends, Polysulphone and SAN.

GC B 58 has high purity and it can be used in electrical applications.

PHYSICO-CHEMICAL PROPERTIES

Appearance	White powder
Bromine content, %	ab. 58
Melting point, °C	210-240
Density, g/cm ³	ab. 2.2
Volatiles, %	≤ 0.2%

TGA (10 mg @ 10°C/min under N ₂) (Lit.)	Loss weight	1%	5%	10%	50%
	Temperature	370°C	380°C	423°C	475°C

HANDLING AND STORAGE: The processing and use of GC B 58 requires adequate technical and professional knowledge. Please consult safety data sheet for further handling, storage and toxicity information.

GC B 58 has to be stored in tightly sealed original container in a cool and well-ventilated area, away from direct sunlight.

PACKAGING: Standard pack size of GC B 58 is 25 Kg in plastic bags or 1MT Big Bag.

Important note

Some plastic additives, fillers or pigments can influence significantly on flame retardant properties. Before to use the products, please be informed.

Stop machine with high temperature could create degradation of polymers. Please clean with neutral polymers.

NOTE:

Information contained in this document is provided to the best of our knowledge and is considered true as per revision date. We do not accept any liability for loss and damage that may occur from the improper use of this information and for the use against the safety legal requirements and patent rights. This specification does not release the customer from the obligation to check the product as to its suitability for intended area of usage.